


Compocel[®] AL and Compocel AL FR

ALUMINIUM SKINS

Thickness mm: 0,5 - 0,8 - 1 (standard)

CORE

Aluminium honeycomb (Alloy series 3000*) with hexagonal cells
Diameter: Ø1/4", Ø3/8", Ø1/2", Ø3/4"
Thickness Foil: from 50 to 70 microns

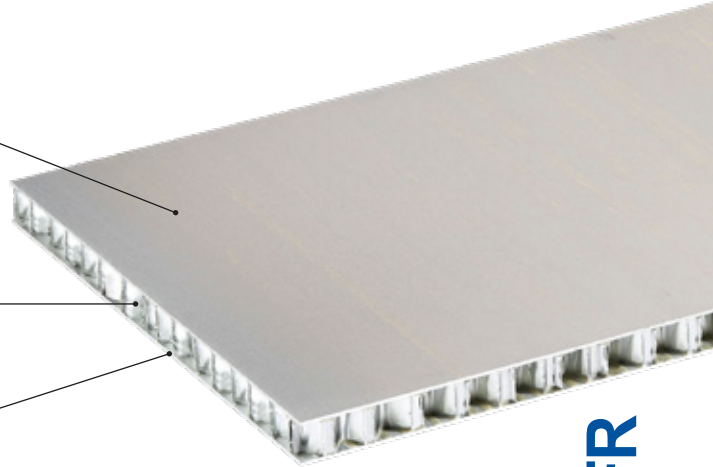

* To Aluminium alloy series 3000 belong: Aluminium alloy 3003, Aluminium alloy 3005, Aluminium alloy 3103, Aluminium alloy 3104.

Technical data sheet for standard panels (dimensions, materials and special finishes on request)

TECHNICAL CHARACTERISTICS OF PANEL		panel size		standard 1250 x 2500 / 1250 x 3000 / 1500 x 3000; On request up to 2000 x 7000						
		thickness' tolerance	mm	± 0,3						
dimension's tolerance	mm	± 30								
planarity ***	mm/m	+/-1								
skins' thickness	mm	from 0,5 to 5,0								
skin alluminium alloy		1000 series, 3000 series, 5000 series								
honeycomb alluminium alloy		3000 series, 5000 series								
thickness of honeycomb foil	µm	50 and 70								
diameter of honeycomb	Ø = mm	from 3 to 19								
honeycomb density	Kg/m ³	from 20 to 163								
adhesive		two-components polyurethane adhesive/thermoplastic film/ epoxy film/ two-components epoxy adhesive								
skin characteristics		rough/primer/polyester/PVDF/ anodised								
PANEL PHYSIC AND MECHANIC PERFORMANCES	type panel (some examples)	Panel Thickness mm	6	10	15	10	15	20	25	
		Skin Thickness mm	0,5 + 0,5			1,0 + 1,0				
	panel weight ‡	Kg/m ²	3,8	4,0	4,3	6,7	7,0	7,3	7,6	
	compressive stabilised strength MPa ** ‡	ASTM C 365-365 M	Mpa	2,9						
	maximum load ** ‡	ASTM C 393 †	N	190	340	520	600	1.000	1.350	1.700
	deflection at maximum load ‡	ASTM C 393 †	mm	14	8	6	8	6	4	3
	skins E Elastic Modulus		Mpa	68.000 - 70.000						
	moment of inertia I **		mm ⁴ /m	7.600	22.000	52.000	40.000	98.000	181.000	288.000
	average resistance to peeling ** ‡	ASTM D1781-98 (2012)		> 280 N/76 mm or 40 Nmm/mm						
	maximum service temperature **		°C	- 40 / + 60; on request + 80 / + 100 / + 150						
thermal expansion coefficient **		°C ⁻¹	2,3 x 10 ⁻⁵							

* Tested by Certifying Institute, pass the test for thickness from 5 to 50mm rough, primer, painted, certificate on request

** Tested by Internal Laboratory

*** Approximate value

† Sample dimension with 4 support points (L, W) 540x50mm; distance among the lower points 500mm,

distance among the upper points 250mm


‡ Values for a panel with a honeycomb core of Ø6 56kg/m³ (Ø 1/4")

1/2

Certified version COMPOCEL AL FR must be required while asking for a quotation.
 Certified products must be required in advance and might have a price surcharge due to certified materials.

Certifications/Classifications for COMPOCEL AL FR's fire Resistance - Thickness of the panel from 3 to 100 mm			
Type	Norm	Sector	Certification/ Classification
Low flame spread	IMO MED FTP Code 2010	Shipyard	Mod B.pdf Mod D.pdf
Smoke, droplets, calorific value	UNI EN 13501-1	Building	Class A2.pdf Class B.pdf
Floors, ceilings, interiors , R1, R2, R10	UNI EN 45545-2	Railway	HL3.pdf

Standard dimensions (other dimensions available on request) - Dimension tolerance ±30mm

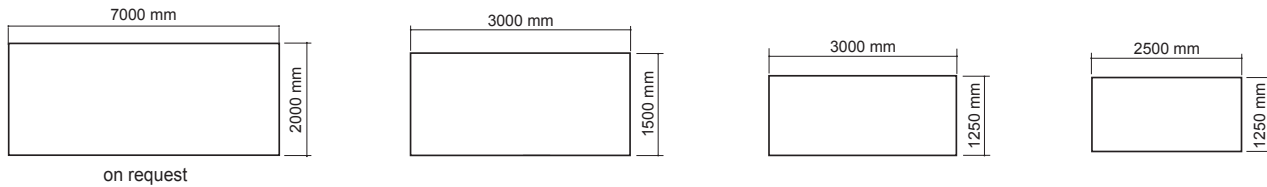

Honeycomb core's properties		50 Microns			
Type	ALUMINIUM ALLOY 3003/3005/3103/3104				
Ø honeycomb in mm	6	9	12	19	
Ø honeycomb in inches	1/4"	3/8"	1/2"	3/4"	
Density Kg/m ³	56 - 59	39 - 40	29 - 30	20 - 21	
Compressive stabilised strength MPa	3,0 - 3,5	1,4 - 1,95	0,8 - 0,95	0,4 - 0,6	

Honeycomb core's properties		70 Microns			
Type	ALUMINIUM ALLOY 3003/3005/3103/3104				
Ø honeycomb in mm	6	9	12	19	
Ø honeycomb in inches	1/4"	3/8"	1/2"	3/4"	
Density Kg/m ³	80 - 83	54	40 - 42	27 - 29	
Compressive stabilised strength MPa	4,3 - 4,6	2,5 - 2,6	1,41 - 1,5	0,85 - 0,9	



Aluminium honeycomb